


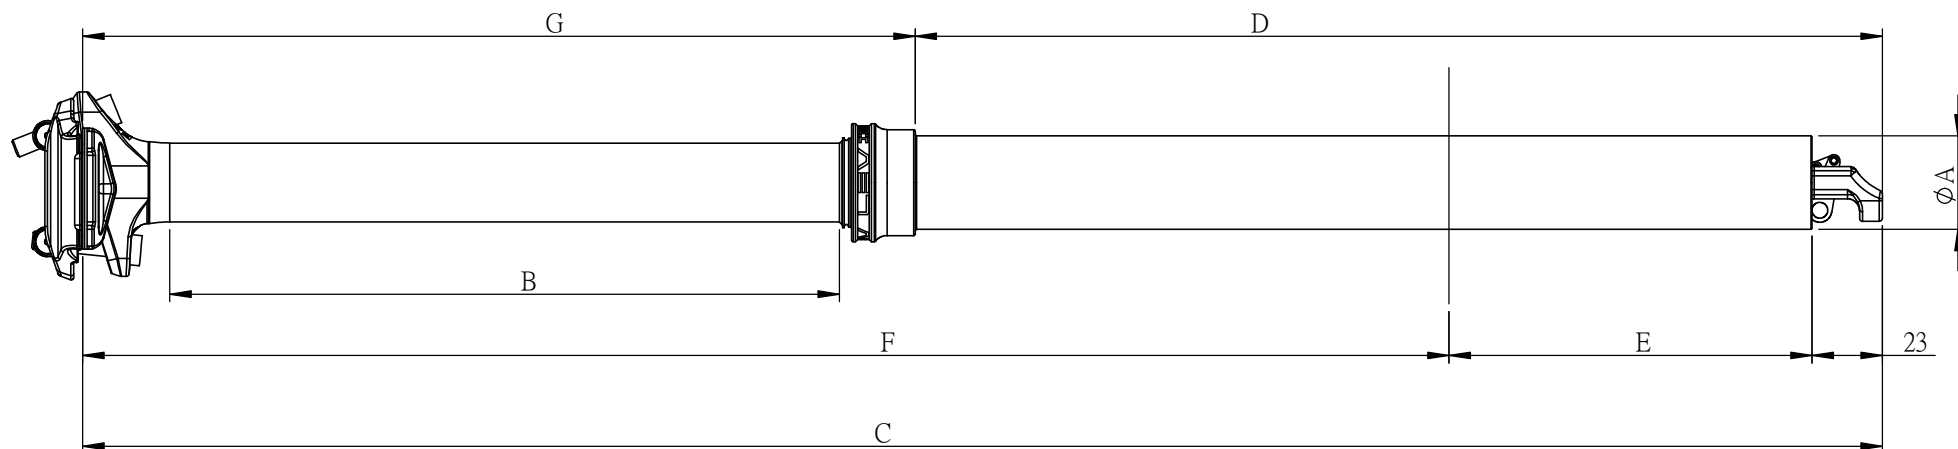

| A(Diameter) | B(Travel) | C(Total Length) | D(Insert) | E(Min Insert) | F(Max Extension) | G(Seal collar to dimension) |
|-------------|-----------|-----------------|-----------|---------------|------------------|-----------------------------|
| 30.9 / 31.6 | 65        | 295             | 180       | 90            | 182              | 115                         |
|             | 100       | 330             | 180       | 90            | 217              | 150                         |
|             | 125       | 380             | 205       | 100           | 257              | 175                         |
|             | 150       | 430             | 230       | 100           | 307              | 200                         |
|             | 175       | 480             | 255       | 110           | 347              | 225                         |
|             | 200       | 530             | 280       | 110           | 397              | 250                         |
|             | 225       | 595             | 320       | <b>120</b>    | 452              | 275                         |

\*The dimensional tolerance of C,D,F and G is  $\pm 5\text{mm}$ .

Model : LEV-integra(A12)-C217

Date : 20230617

Measurements in mm